

Work Order ID 145474

Thursday, May 05, 2016 3:14:31 PM

145474

Page 1

Item ID: D044-719-011L08 Accept ***N900040100*** Setup Start ***NS1***
Revision ID: Stop ***NS2***
Item Name: R44 Cabin Floor Protectors - Clear
Start Date: 4/28/2016 Start Qty: 2.00 ***2*** Cust Item ID:
Required Date: 5/5/2016 Req'd Qty: 2.00 ***2*** Customer:
Reference:

Approvals: Process Plan: sem Date: 16/05/06 Tooling: _____ Date: _____
QC: _____ Date: _____ SPC (Y/N): _____ Date: _____
Run Start ***NR1***
Stop ***NR2***

Sequence ID/ Work Center ID	Operation Description	Set Up/ Run Hours	Tool ID	Tool #	Plan Code	Accept Qty	Reject Qty	Reject Number	Insp. Stamp
Draw Nbr	Revision Nbr								
D3281	Rev F								
DSI 9504	A								
100	Document Control	9.00	DAS						
100	DOCUMENT CONTROL		6						
DC	Memo	0.00							
Doc.Control -USB or Paperwork	Photocopy bluefile and create labels per PPP D044-719-011L08 CHG001								
110	Pick Kit	0.00							
110									
Packaging	Memo	0.00							
Packaging									

DAS
21
9-89

10-07-04

②

DAS
27
9-89

JUL 08 2016

PC

JUL 06 2016

DQA: _____ Date: _____



WORK ORDER NON-CONFORMANCE / UPDATE

QA Closed: _____ Date: _____

Work Order update only ☐

Work Order: _____ Part No. _____ NCR No. _____		DISPOSITION Rework ☐ Scrap ☐ Use-as-is ☐ Suspected Unapproved ☐		AGAINST DEPARTMENT/PROCESS Skid-tube ☐ Machining ☐ Thermoforming ☐ Large Fab ☐ Cross tube ☐ Small Fab ☐ Finishing ☐ Composite ☐ Water Jet ☐ Prod. Eng. Coord. ☐ Rec/Store/Packaging ☐ Supplier ☐ Engineering ☐ Quality ☐ Other ☐					
Date :		Step #:		QTY Effective :			MRB (QSI042) Approval Completed By _____ Lead hand / Supervisor Approval Verification _____ QC / QA Coordinator Approval _____		
Description Work Order Deviation				Disposition					
Root Cause Environment ☐ Design ☐ Doc/Data ☐ Equip/Tooling ☐ Handling/Pre ☐ Material ☐ Internal Transport ☐ Tribal Knowledge ☐ LOA ☐ Substation ☐ Past Expiry Date ☐ Misidentified ☐ No Re-verification ☐ Operator ☐ Offset/Setup ☐ Supplier ☐ Training ☐ Use for Testing ☐ Poor Information ☐ Rushing ☐ Product Improvement ☐ Process Improvement ☐ Manufacturing Process ☐ Past Due ☐		FAULT CATEGORY Pressure/Forced ☐ Bending ☐ Centre Not Concentric ☐ Cracks ☐ Crimp/Kink/Ripple/Wave ☐ Cuffs ☐ Crushing ☐ Heat Treat ☐ Wave/Twist in Tube ☐ Marks/Chatter ☐ Temperature/Cure ☐ Set-up ☐ BOM/Route ☐ Broken/Damage/Defect ☐ Inspection Incomplete/Unqualified ☐ Contamination ☐ Countersink ☐ Cut Too Short ☐ Instructions Incomplete/Unclear ☐ Drill Holes ☐ Power Loss/Surge ☐ Folio/Program ☐ Grain ☐ Weld ☐ Wrong Stock Pulled ☐ Out of Sequence ☐ Off-set ☐ Mislabeled ☐ Fit/Function ☐ Misaligned/off center ☐ Positioned Wrong ☐ Outside Dimensions ☐ Over/Under tolerance ☐ Part Incorrect ☐ Part Lost/Missing ☐ Part Moved ☐ Drawing ☐ Finish ☐ Misread ☐ Turning Sequence ☐		OTHER : ☐					

Work Order ID 145474

Thursday, May 05, 2016 3:14:31 PM

145474

Page 2

Item ID: D044-719-011L08

Accept

N900040100Setup Start ***NS1***

Revision ID:

Stop ***NS2***

Item Name: R44 Cabin Floor Protectors - Clear

Start Date: 4/28/2016 Start Qty: 2.00

2

Cust Item ID:

Required Date: 5/5/2016 Req'd Qty: 2.00

2

Customer:

Reference:

Approvals: Process Plan: _____ Date: _____ Tooling: _____ Date: _____

Run Start ***NR1***

QC: _____ Date: _____ SPC (Y/N): _____ Date: _____

Stop ***NR2***

Sequence ID/ Work Center ID	Operation Description	Set Up/ Run Hours	Tool ID	Tool #	Plan Code	Accept Qty	Reject Qty	Reject Number	Insp. Stamp
--------------------------------	--------------------------	----------------------	---------	--------	--------------	---------------	---------------	------------------	----------------

120

QC4- 100% Inspect kits for completeness

0.00

120

QC

Memo

0.06

Quality Control

X2

DAS
27
9-89
JUL 8 0 700

130

Packaging

0.00

130

Packaging

Memo

0.00

Packaging

Identify and pack for shipping as per PPP D044-719-011L08
Location: PG026

X2

DAS
27
9-89
JUL 8 0 700

140

QC21- Final Inspection - Work Order Release

0.00

140

QC

Memo

0.20

Quality Control

DAS
21
9-89
JUL 11 2016DAS
21
9-89
JUL 11 2016

DQA: _____ Date: _____



WORK ORDER NON-CONFORMANCE / UPDATE

QA Closed: _____ Date: _____

Work Order update only ☐

Work Order: _____ Part No. _____ NCR No. _____		DISPOSITION Rework ☐ Scrap ☐ Use-as-is ☐ Suspected Unapproved ☐		AGAINST DEPARTMENT/PROCESS Skid-tube ☐ Machining ☐ Thermoforming ☐ Large Fab ☐ Cross tube ☐ Small Fab ☐ Finishing ☐ Composite ☐ Water Jet ☐ Prod. Eng. Coord. ☐ Rec/Store/Packaging ☐ Supplier ☐ Engineering ☐ Quality ☐ Other ☐					
Date :		Step #:		QTY Effective :			MRB (QSI042) Approval Completed By Lead hand / Supervisor Approval Verification QC / QA Coordinator Approval		
Description Work Order Deviation				Disposition					
Root Cause Environment ☐ Design ☐ Doc/Data ☐ Equip/Tooling ☐ Handling/Pre ☐ Material ☐ Internal Transport ☐ Tribal Knowledge ☐ LOA ☐ Substation ☐ Past Expiry Date ☐ Misidentified ☐ No Re-verification ☐ Operator ☐ Offset/Setup ☐ Supplier ☐ Training ☐ Use for Testing ☐ Poor Information ☐ Rushing ☐ Product Improvement ☐ Process Improvement ☐ Manufacturing Process ☐ Past Due ☐		FAULT CATEGORY Pressure/Forced ☐ Bending ☐ Centre Not Concentric ☐ Cracks ☐ Crimp/Kink/Ripple/Wave ☐ Cuffs ☐ Crushing ☐ Heat Treat ☐ Wave/Twist in Tube ☐ Marks/Chatter ☐ Temperature/Cure ☐ Set-up ☐ BOM/Route ☐ Broken/Damage/Defect ☐ Inspection Incomplete/Unqualified ☐ Contamination ☐ Countersink ☐ Cut Too Short ☐ Instructions Incomplete/Unclear ☐ Drill Holes ☐ Power Loss/Surge ☐ Folio/Program ☐ Grain ☐ Weld ☐ Wrong Stock Pulled ☐ Out of Sequence ☐ Off-set ☐ Mislabeled ☐ Fit/Function ☐ Misaligned/off center ☐ Positioned Wrong ☐ Outside Dimensions ☐ Over/Under tolerance ☐ Part Incorrect ☐ Part Lost/Missing ☐ Part Moved ☐ Drawing ☐ Finish ☐ Misread ☐ Turning Sequence ☐							
		OTHER : ☐							

Picklist Print

Thursday, May 05, 2016 3:14:31 PM

Page 1

Work Order ID: 145474

145474

Parent Item: D044-719-011L08

D044-719-011L08

Parent Item Name: R44 Cabin Floor Protectors - Clear

Start Date: 4/28/2016

Required Date: 5/5/2016

Start Qty: 2.00

Required Qty: 2.00

Comments: IPP Rev:A04.09.17New IssueKJ/JLM
 IPP Rev: B 04.02.02 Material change to Lexan 0.125" DL
 IPP Rev C. 07.08.07 Thermoformed in house DL
 IPP Rev D. 08.04.14 Material change to Lexan 0.093" DL

Component Item ID/ Item Name	Replacement Item ID	Mfg/ Purch	Bin Item	Primary Location	Last Location	Route Seq ID	Unit of Measure	Qty on Hand	Qty per Kit	Total Qty	Qty Issued	Date Issued	Status
D3281-1L08 *D3281-1L08* Floor Protector, Fwd LH	27 9-89	Manufactured	No			110	Each	0.0000	1	2			
D3281-2L08 *D3281-2L08* Floor Protector, Fwd RH	27 9-89	Manufactured	No			110	Each	0.0000	1	2			
D3281-3L08 *D3281-3L08* Floor Protector, Aft LH	DAS 27 9-89	Manufactured	No			110	Each	0.0000	1	2			
D3281-4L08 *D3281-4L08* Floor Protector, Aft RH	27 9-89	Manufactured	No			110	Each	0.0000	1	2			
D2854-1-100 *D2854-1-100* Velcro Strip, Looped	DAS 27 9-89	Manufactured	No			110	Each	12.0000	8	16			
D2854-3-100 *D2854-3-100* Hooked Velcro	DAS 27 9-89	Manufactured	No			110	Each	12.0000	8	16			

Location

ST410

141089

Loc Qty

12

12

Loc Code

Location

ST410

139549

Loc Qty

12

12

Loc Code

B 145 682 PC

B 145 447 PC

B 145 839 PC

B 145 756 DC

~~B 145 089~~ PC

146039x4

~~B 139 549~~ PC

145792x4

JUL 06 2016

DQA: _____ Date: _____



WORK ORDER NON-CONFORMANCE / UPDATE

QA Closed: _____ Date: _____

Work Order update only ☐

Work Order: _____ Part No. _____ NCR No. _____		DISPOSITION Rework ☐ Scrap ☐ Use-as-is ☐ Suspected Unapproved ☐		AGAINST DEPARTMENT/PROCESS Skid-tube ☐ Machining ☐ Thermoforming ☐ Large Fab ☐ Cross tube ☐ Small Fab ☐ Finishing ☐ Composite ☐ Water Jet ☐ Prod. Eng. Coord. ☐ Rec/Store/Packaging ☐ Supplier ☐ Engineering ☐ Quality ☐ Other ☐					
Date :		Step #:		QTY Effective :			MRB (QSI042) Approval		
Description Work Order Deviation				Disposition				Completed By	
								Lead hand / Supervisor Approval Verification	
								QC / QA Coordinator Approval	
Root Cause		FAULT CATEGORY							
Environment ☐	No Re-verification ☐	Pressure/Forced ☐	Temperature/Cure ☐	Power Loss/Surge ☐	Positioned Wrong ☐				
Design ☐	Operator ☐	Bending ☐	Set-up ☐	Folio/Program ☐	Outside Dimensions ☐				
Doc/Data ☐	Offset/Setup ☐	Centre Not Concentric ☐	BOM/Route ☐	Grain ☐	Over/Under tolerance ☐				
Equip/Tooling ☐	Supplier ☐	Cracks ☐	Broken/Damage/Defect ☐	Weld ☐	Part Incorrect ☐				
Handling/Pre ☐	Training ☐	Crimp/Kink/Ripple/Wave ☐	Inspection Incomplete/Unqualified ☐	Wrong Stock Pulled ☐	Part Lost/Missing ☐				
Material ☐	Use for Testing ☐	Cuffs ☐	Contamination ☐	Out of Sequence ☐	Part Moved ☐				
Internal Transport ☐	Poor Information ☐	Crushing ☐	Countersink ☐	Off-set ☐	Drawing ☐				
Tribal Knowledge ☐	Rushing ☐	Heat Treat ☐	Cut Too Short ☐	Mislabeled ☐	Finish ☐				
LOA ☐	Product Improvement ☐	Wave/Twist in Tube ☐	Instructions Incomplete/Unclear ☐	Fit/Function ☐	Misread ☐				
Substation ☐	Process Improvement ☐	Marks/Chatter ☐	Drill Holes ☐	Misaligned/off center ☐	Turning Sequence ☐				
Past Expiry Date ☐	Manufacturing Process ☐	OTHER : _____							
Misidentified ☐	Past Due ☐								


8 7 6 5 4 3 2 1

D

C

B


A

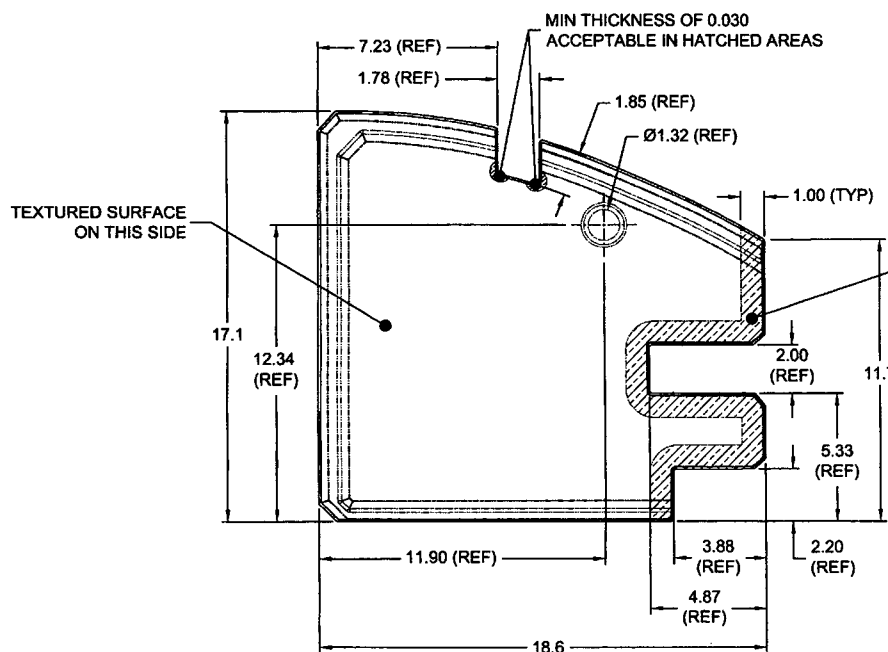

D3281-1 FLOOR PROTECTOR

MIN THICKNESS
OF 0.030
ACCEPTABLE IN
HATCHED AREA

0.95
0.50 (REF)

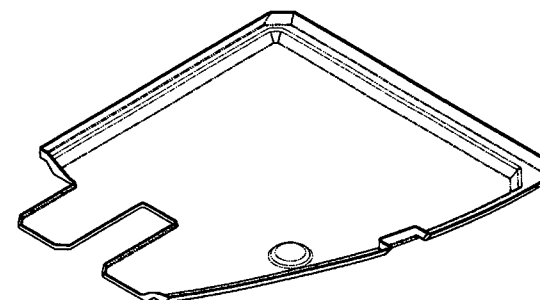

RELEASED
2010-11-25

NOTES:


- 1) MATERIAL: -1L02 = LEXAN F6006, BLACK No. 701, 0.093" THICK (MLEXS.093-F6006-02)
-1L08 = LEXAN 90318 (PROTECT-A-GLAZE), 0.118 THICK, 112-CLEAR (MLEXS.118-90318-08)
- 2) FINISH: NONE
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: 0.010 MAX
- 6) IDENTIFICATION: IDENT WITH DART P/N "D3281-1Lxx" AND B/N PER QSI 044 6.4 ALONG PERIMETER OF PART AS SHOWN.
- 7) WEIGHT: D3281-1L02 = 0.95 lb D3281-1L08 = 1.13 lb
- 8) THERMOFORM WITH MOLD D3281-1T1 PER DART QSI 022; TRIM AS SHOWN
MINIMUM THICKNESS AFTER FORMING: 0.070" EXCEPT WHERE INDICATED



REV.	DESCRIPTION	BY	DATE
F	NOTES UPDATED. FLAG NOTE 6 WAS 7 & RELOC. D.E.O. D3281-E-1 INC. DIM 17.0 WAS 17.1 (ZN B5-3, B6-4) & 17.7 WAS 17.8 (ZN C5-3, C6-4) REF CAR 10-21.	JPH	10.09.27
E	-3/4 NOW TRIMMED FLAT; RMV 0.25 BEVEL TO FACILITATE TRIMMING (ZN D6-3, D4-4)	CP	10.01.05
D	THICKNESS 0.093 WAS 0.125, MIN THICKNESS 0.070 WAS 0.080, P/N AND B/N ID WITH VIBRATING STYLUS (ZN A7-1, A7-2, A7-3, A7-4); D3281-4 NOW ON PAGE 4; CORRECT WEIGHTS (ZN A8-1, A8-2, A8-3, A8-4)	PH	08.03.28
C	UPDATE DIMS TO MATCH PARTS: COLOUR 701 WAS 700; GENERAL UPDATE	LE	07.10.09
B	NOW LEXAN; DIMS AS MANUFACTURED	CP	05.11.25
A	NEW ISSUE	CP	04.05.03
DESIGN		DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA DRAWING NO. D3281 TITLE FLOOR PROTECTOR SCALE NTS COPYRIGHT © 2004 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	
DRAWN			
CHECKED			
MFG. APPR.			
APPROVED			
DE APPR.			
DATE	10.09.27		

w/o 145474

2m 16/05/06

8 7 6 5 4 3 2 1

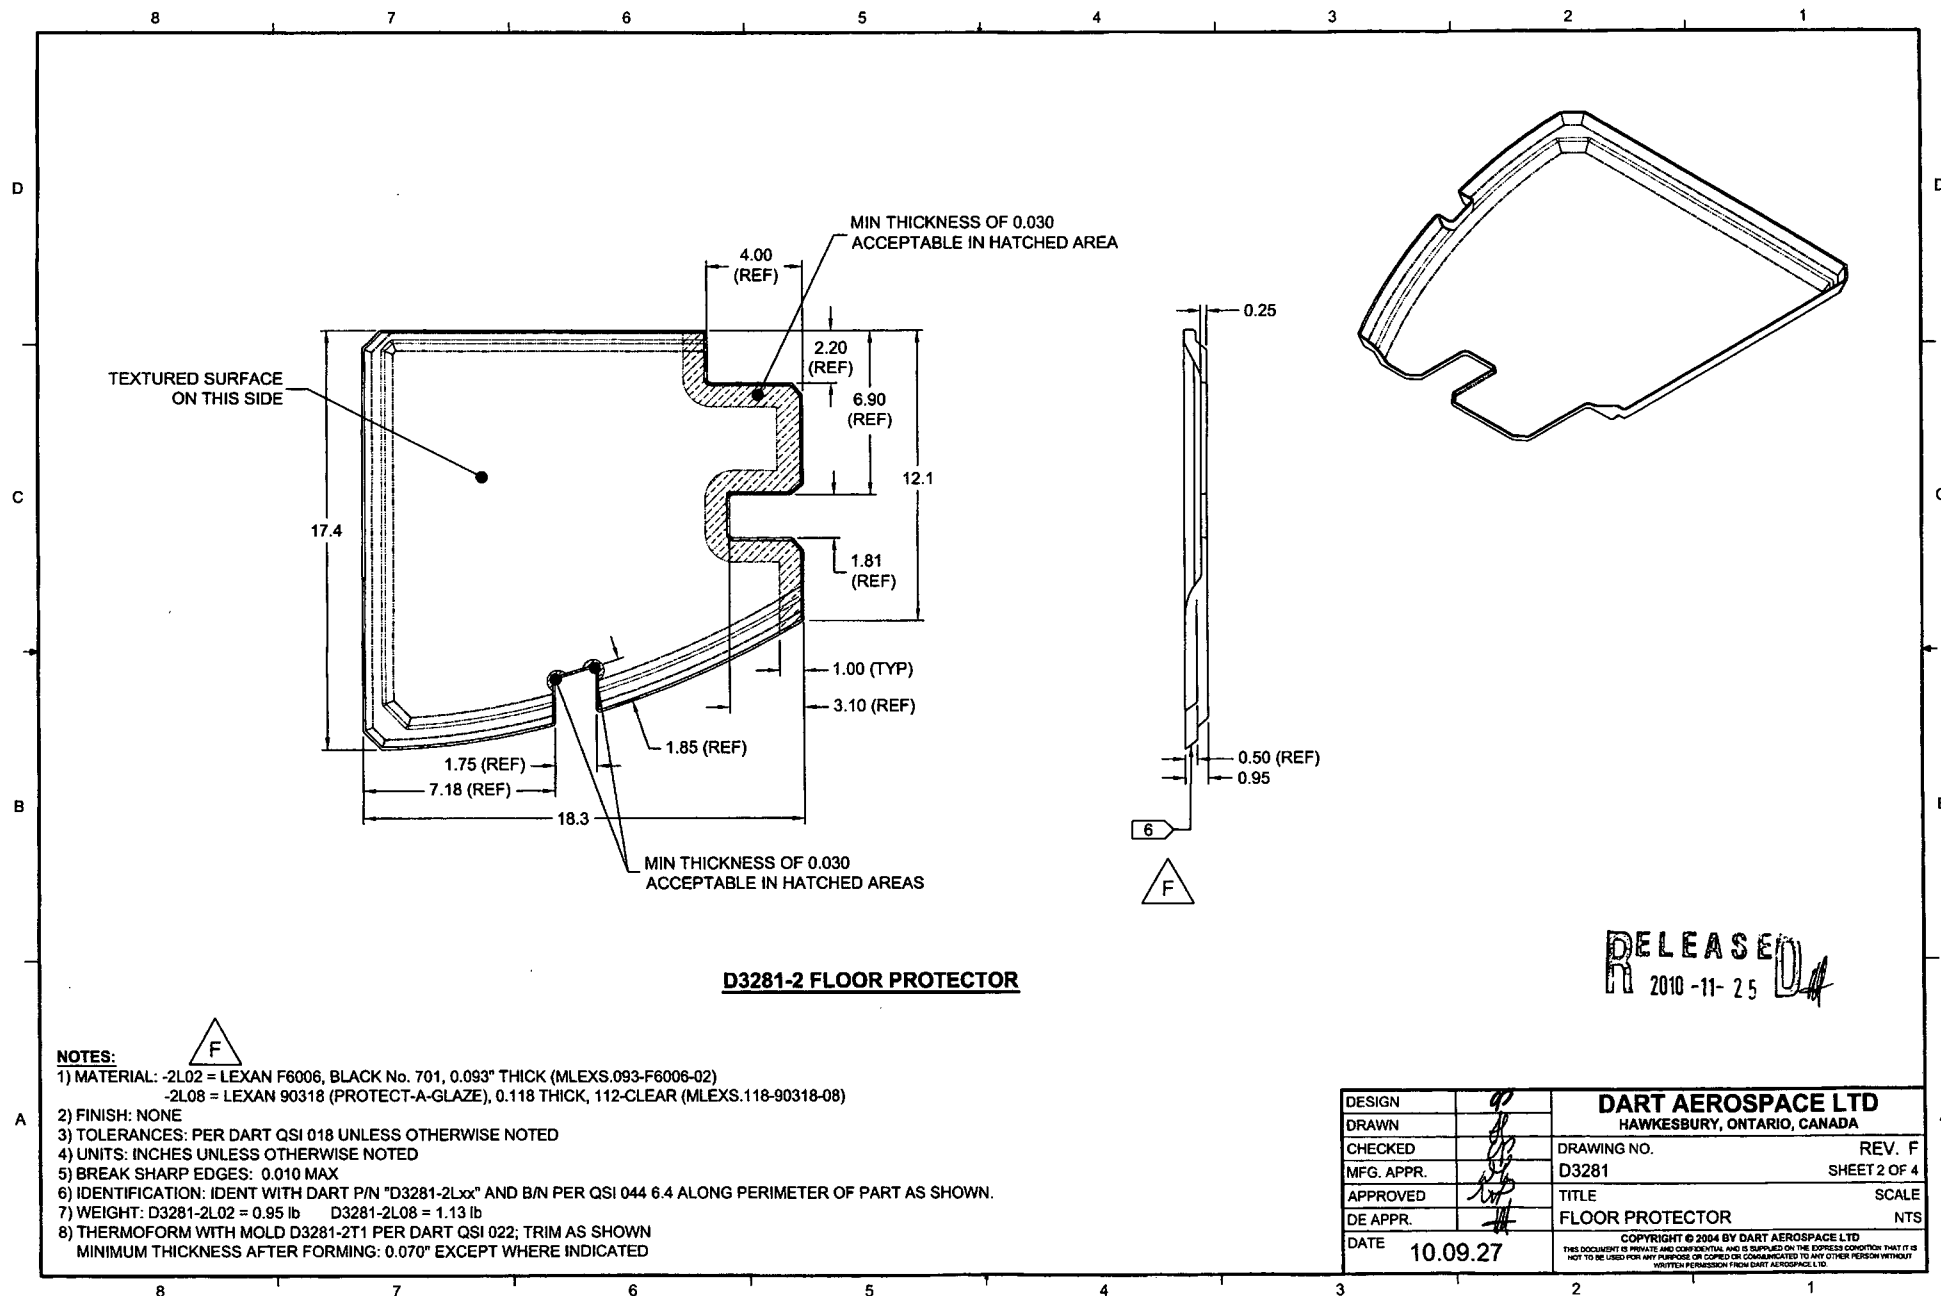

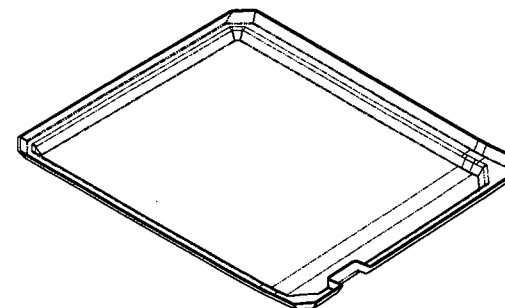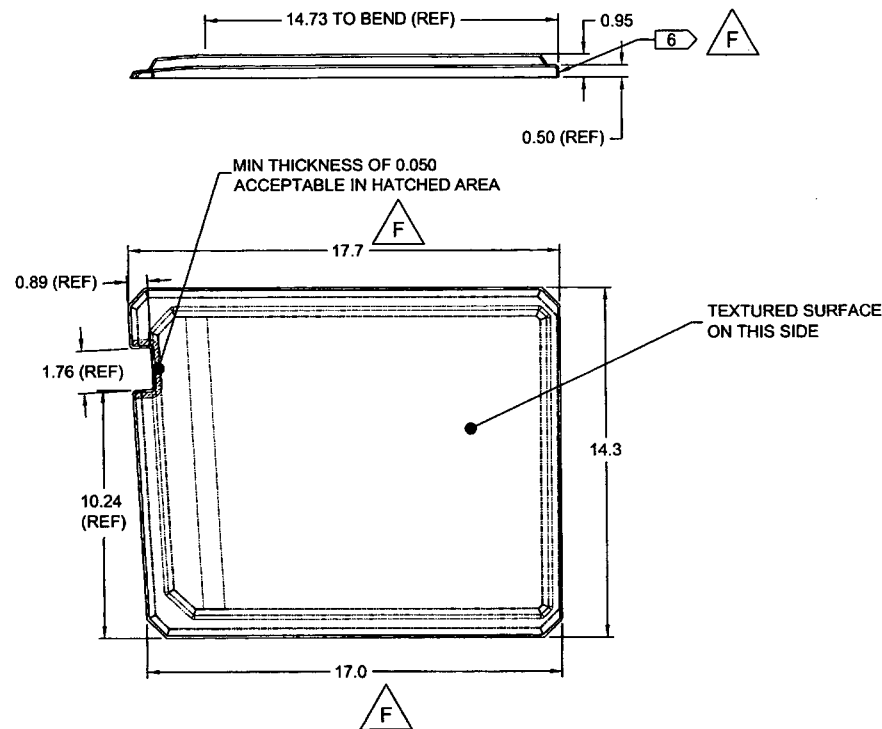




D3281-3 FLOOR PROTECTOR

RELEASE
2010-11-25

NOTES:

- 1) MATERIAL: -3L02 = LEXAN F6006, BLACK No. 701, 0.093" THICK (MLEXS.093-F6006-02)
-3L08 = LEXAN 90318 (PROTECT-A-GLAZE), 0.118 THICK, 112-CLEAR (MLEXS.118-90318-08)
- 2) FINISH: NONE
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: 0.010 MAX
- 6) IDENTIFICATION: IDENT WITH DART P/N "D3281-3Lxx" AND B/N PER QSI 044 6.4 ALONG PERIMETER OF PART AS SHOWN.
- 7) WEIGHT: D3281-3L02 = 0.87 lb D3281-3L08 = 1.05 lb
- 8) THERMOFORM WITH MOLD D3281-3T1 PER DART QSI 022; TRIM AS SHOWN
MINIMUM THICKNESS AFTER FORMING: 0.070" EXCEPT WHERE INDICATED

DESIGN	<i>90</i>	DART AEROSPACE LTD	
DRAWN	<i>90</i>	HAWKESBURY, ONTARIO, CANADA	
CHECKED	<i>90</i>	DRAWING NO.	REV. F
MFG. APPR.	<i>90</i>	D3281	SHEET 3 OF 4
APPROVED	<i>90</i>	TITLE	SCALE
DE APPR.	<i>90</i>	FLOOR PROTECTOR	NTS
DATE	10.09.27	COPYRIGHT © 2004 BY DART AEROSPACE LTD	
THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.			

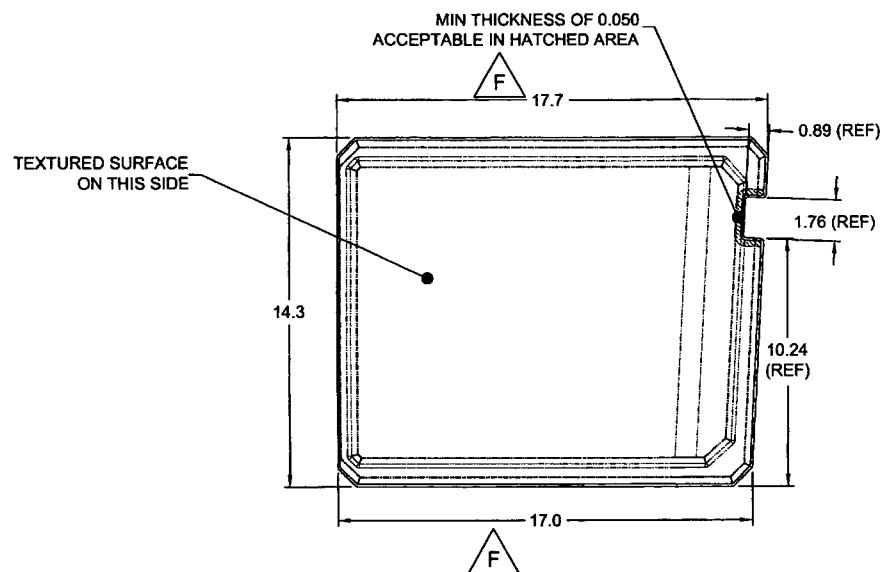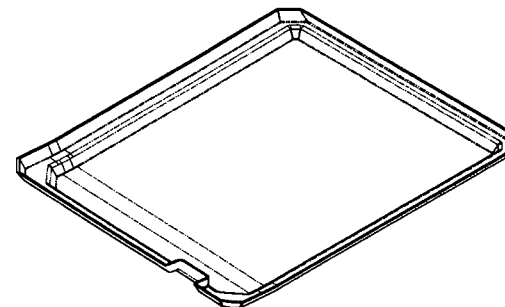

D3281-4 FLOOR PROTECTOR

RELEASED
2010-11-25

D3281-4 NOTES:

- 1) MATERIAL: -4L02 = LEXAN F6006, BLACK No. 701, 0.093" THICK (MLEXS.093-F6006-02)
-4L08 = LEXAN 90318 (PROTECT-A-GLAZE), 0.118 THICK, 112-CLEAR (MLEXS.118-90318-08)
- 2) FINISH: NONE
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: 0.010 MAX
- 6) IDENTIFICATION: IDENTIFICATION: IDENT WITH DART P/N "D3281-4Lxx" AND B/N PER QSI 044 6.4 ALONG PERIMETER OF PART AS SHOWN.
- 7) WEIGHT: D3281-4L02 = 0.87 lb D3281-4L08 = 1.05 lb
- 8) THERMOFORM WITH MOLD D3281-4T1 PER DART QSI 022; TRIM AS SHOWN
MINIMUM THICKNESS AFTER FORMING: 0.070" EXCEPT WHERE INDICATED

DESIGN		DART AEROSPACE LTD	
DRAWN		HAWKESBURY, ONTARIO, CANADA	
CHECKED		DRAWING NO.	REV. F
MFG. APPR.		D3281	SHEET 4 OF 4
APPROVED		TITLE	SCALE
DE APPR.		FLOOR PROTECTOR	NTS
DATE	10.09.27	COPYRIGHT © 2004 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	

REFERENCE ONLY

Work Of
Thursday, 11

DART SERVICE INSTRUCTION

TO AMEND INSTALLATION INSTRUCTIONS IIN-D044-719 REV. A
AND INSTRUCTIONS FOR CONTINUED AIRWORTHINESS ICA-D044-719 REV. 0

REF TCCA STC: SH04-40

REF FAA STC: SR02051NY

REF EASA STC: EASA.IM.R.S.01075

PURPOSE:

To add the D044-719-011L08 Clear Cabin Floor Protectors. The -011L08 kit is similar to the existing -011 kit, however the plastic is transparent instead of solid black. The existing D044-719-011 kit will be re-identified as D044-719-011L02.

CHANGE:

The D044-719-011L08 Cabin Floor Protectors kit consists of four transparent plastic trays that are placed on the cabin floor to protect the carpets from damage. The -011L08 kit should be installed per the -011 kit of Installation Instructions IIN-D044-719 and maintained per Instructions for Continued Airworthiness ICA-D044-719. The parts list and weight & balance for the -011L08 kit is given below.

PARTS LIST

QTY -011L02	QTY -011L08	Part Number	Description
X		D044-719-011L02	Cabin Floor Protectors (Black)
	X	D044-719-011L08	Cabin Floor Protectors (Clear)
1		D3281-1L02	Floor Protector, Fwd LH, Black
	1	D3281-1L08	Floor Protector, Fwd LH, Clear
1		D3281-2L02	Floor Protector, Fwd RH, Black
	1	D3281-2L08	Floor Protector, Fwd RH, Clear
1		D3281-3L02	Floor Protector, Aft LH, Black
	1	D3281-3L08	Floor Protector, Aft LH, Clear
1		D3281-4L02	Floor Protector, Aft RH, Black
	1	D3281-4L08	Floor Protector, Aft RH, Clear
8	8	D2854-1-100	Looped Velcro Strip
8	8	D2854-3-100	Hooked Velcro Strip

WEIGHT AND BALANCE

Installation	Weight	Lateral		Longitudinal	
		Arm	Moment	Arm	Moment
D044-719-011L02	3.9 lb	0 in	0 in-lb	50 in	195 in-lb
Cabin Floor Protectors	1.8 kg	0 m	0 m-kg	1.27 m	2.3 m-kg
D044-719-011L08	4.4 lb	0 in	0 in-lb	50 in	220 in-lb
Cabin Floor Protectors	2.0 kg	0 m	0 m-kg	1.27 m	2.5 m-kg

CANADA
DEPARTMENT OF TRANSPORT
AIRCRAFT CERTIFICATION
BRANCH
DAO # 01-O-01

APPROVED

BY: 
D. SHEPHERD (DE # 02)

DATE: 10.02.24
CERT. NO.: SH04-40
ISSUE NO.: 1

A	NEW ISSUE	CP	10.02.24
REV.	DESCRIPTION	BY	DATE
DESIGN	92	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
DRAWN	92		
CHECKED	92	DRAWING NO.	REV. A
MFG. APPR.	N/A	DSI 9504	SHEET 1 OF 1
APPROVED	92	TITLE	SCALE
DE APPR.	92	FLOOR PROTECTOR KIT, CLEAR	NTS
DATE	10.02.24	COPYRIGHT © 2010 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	